




**KTIF**



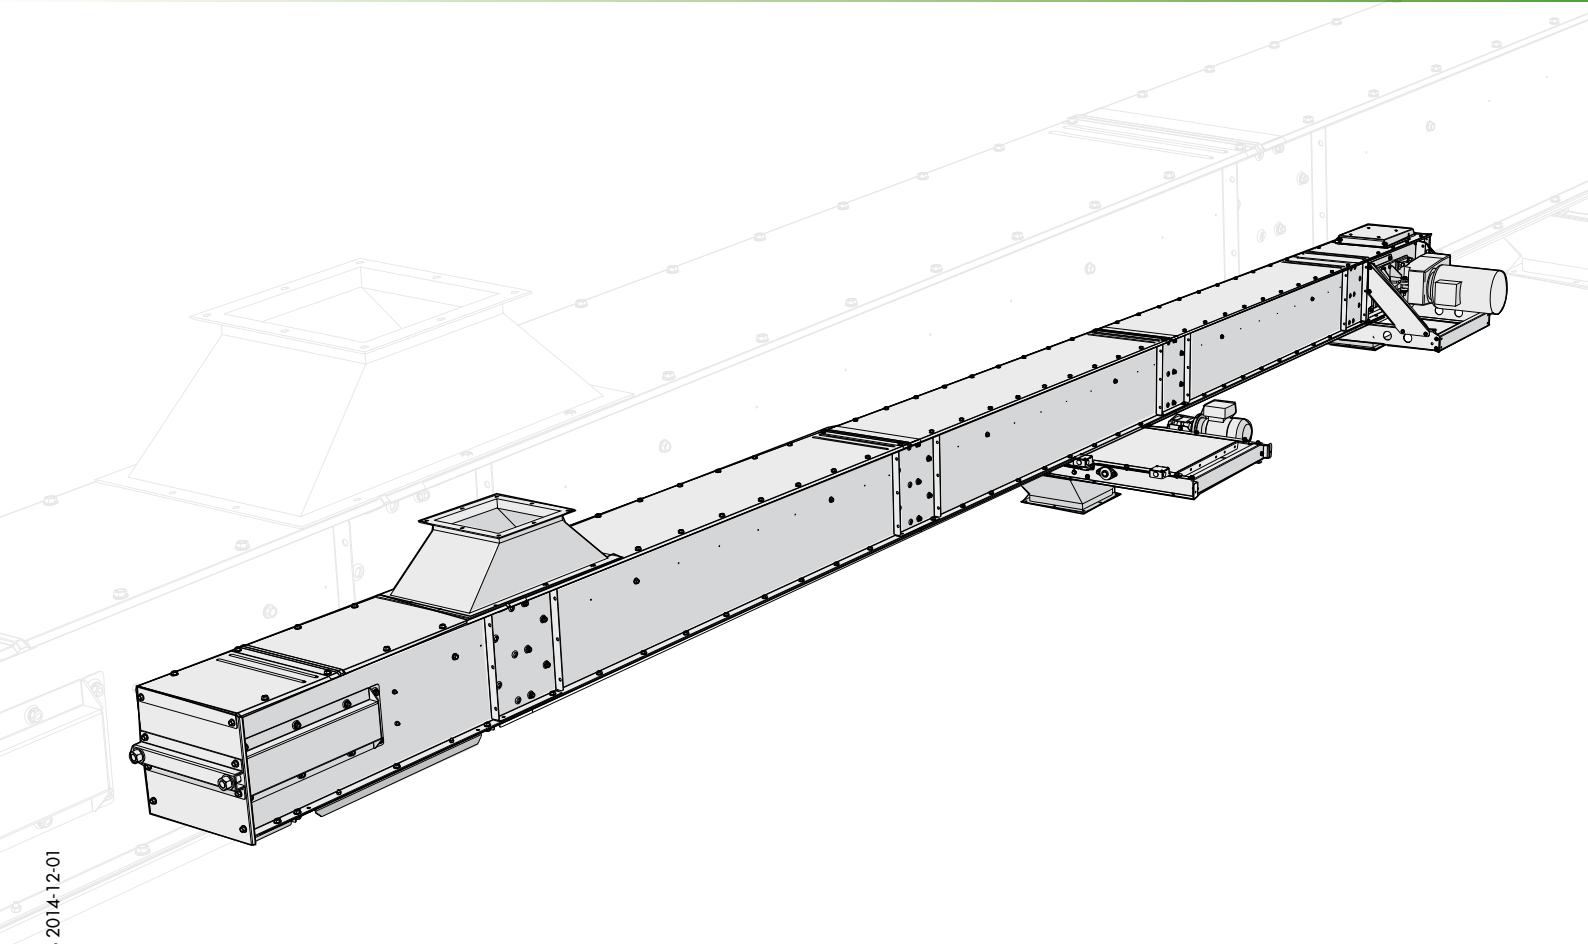

## Goods inspection

Check that the number of packages agrees with the delivery note and that the packing and goods are not damaged. Make a note of any damage and missing materials on the consignment note and report it to the carrier and to us. Make sure the delivery is complete after unpacking the goods. Any materials that are found to be incorrect must not be assembled.

## Warranty

A 2-year factory warranty from the day of delivery applies to all models of Skandia Elevator AB machinery. A condition of the warranty and any subsequent compensation is that Skandia Elevator AB is contacted and an agreement reached between the customer and Skandia Elevator AB on how any faults should be rectified. The warranty covers all parts that are damaged or break due to faulty design or manufacture. Faults and damage caused by faulty assembly, incorrect use or lack of maintenance will not be covered by the warranty.

## CE mark

A CE mark is located on the transmission side of the drive and is proof that the machine has been manufactured in accordance with EU machine directives and complies with safety requirements. The CE mark contains information concerning year of manufacture, model designation and order number. Always specify the order number in the event of a claim and on orders for spare parts.

## EC Declaration

Skandia Elevator AB  
Arentorp  
S-53494 Vara  
SWEDEN

declare under our sole responsibility that the product:

## KTIF

order number:

.....  
to which this declaration relates is in conformity with Council Directive of 29 December 2009 on the harmonisation of the member States relating to machinery, 2006/42/EC.

Unless otherwise specified on the CE mark, the product is manufactured in accordance with EU Machinery Directive and is classified as Category II 2D/OD. It is intended for the transport of materials that correspond with ATEX Zone 21 and the external environment is unclassified.

Vara 29/12 2009

Joakim Larsson, CEO




## Thank you for choosing Skandia Elevator!

Your conveyor system must be assembled correctly and maintained thoroughly if it is to operate satisfactorily. These assembly instructions and the separate maintenance instructions must be followed for the warranty to apply.

We hope you will be pleased with your Skandia conveyor equipment for a long time.

<b>Machine overview</b> .....	<b>6</b>
<b>Safety information</b> .....	<b>7</b>
General safety information .....	7
Electrical safety .....	8
Safety decals .....	9
<b>Before assembly</b> .....	<b>11</b>
Inclination of horizontal conveyor .....	12
Transport in both directions .....	12
<b>Assembling the outlet slide</b> .....	<b>13</b>
Outlet slide in tail end/drive .....	13
Outlet slide in intermediate section .....	13
Brush for outlet slide .....	16
<b>Connection of the machine</b> .....	<b>18</b>
Inlet .....	18
Connection to inlet in horizontal section .....	19
Connection to subsequent machine .....	19
<b>Assembling the machine</b> .....	<b>16</b>

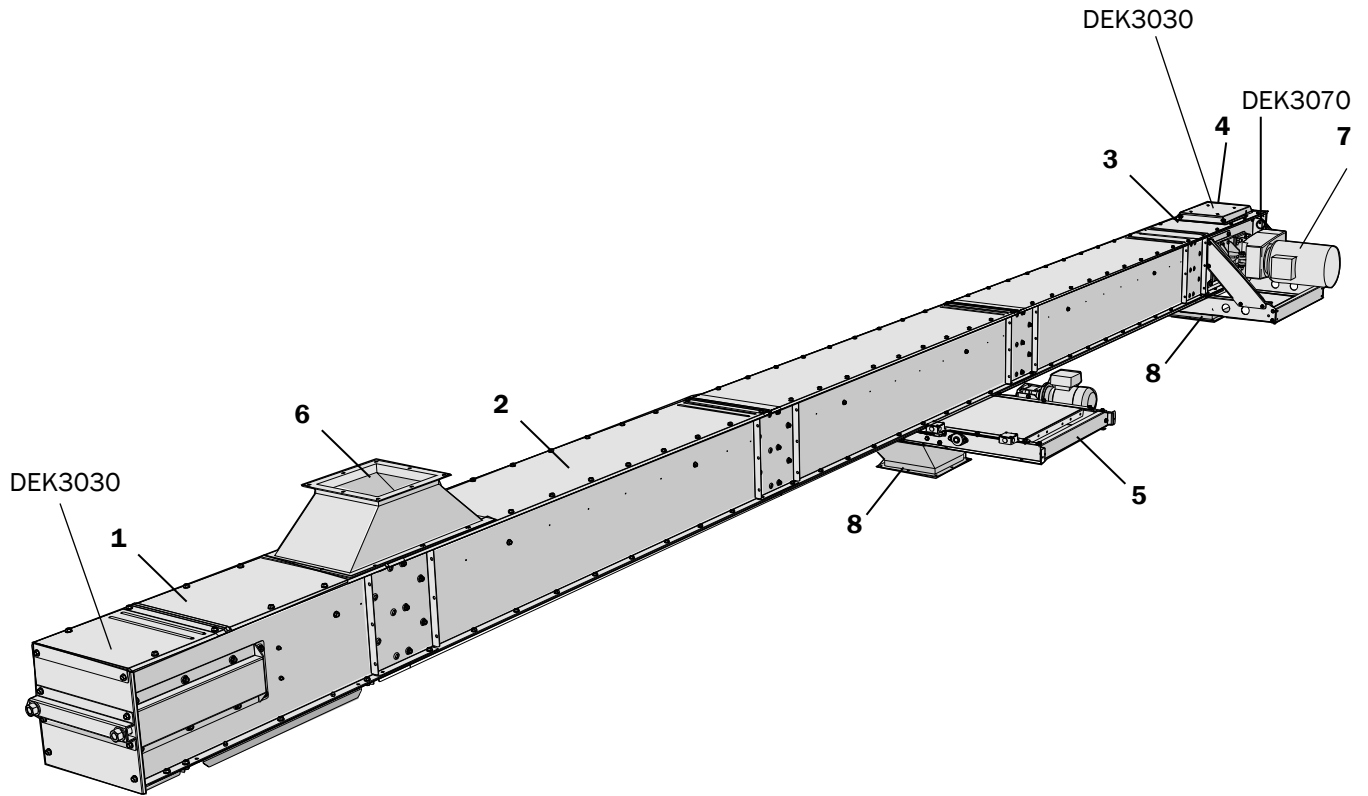

Parts	Pos.
Tail end	1
Intermediate section	2
Drive	3
Pop-up overloading flap	4
Outlet slide	5
Inlet	6
Geared motor	7
Outlet	8
Safety decals	DEK x x x x

The owner of the transport equipment is responsible for these assembly instructions always being available to the fitters, electricians, maintenance technicians and engineering technicians concerned.

Incorrect assembly and/or operation may lead to personal injury or damage to the conveyor equipment and/or other equipment. It can also cause malfunctions or a reduction in capacity.

Read the assembly instructions carefully before assembly, electrical connection, maintenance or operation commences. If any part of these instructions should be difficult to comprehend, please get in touch with your reseller for assistance.

The safety information is presented and interpreted as follows:

**⚠ WARNING!**

Disregarding instructions given in warnings can cause serious personal injury or death.

**⚠ IMPORTANT!**

Ignoring the instructions given in important texts may cause damage to the conveyor equipment and/or other equipment. It can also cause malfunctions or a reduction in capacity.

NB! indicates that the text contains information that will simplify the assembly process.

## General

**⚠ WARNING!**

- Ensure that everyone responsible for assembly, electrical connection, maintenance and operation of the conveyor equipment has read and understood the instructions and safety information.
- Use protective gloves, helmet, steel-toed boots, ear defenders, protective goggles and high-vis vest when carrying out assembly, electrical connection, maintenance and operation of conveyor equipment.



 **WARNING!**

- Stop the machinery and turn off electric power before attempting any type of assembly, electrical connection or maintenance work.
- Do not start the machinery without the lid, hatches, covers, guards and connections fitted in such a way they can only be opened with tools.
- Connections to, from and between machinery must be permanently mounted and fully enclosed. If the design of the installation does not allow this at an outlet, finish off with a 1 m pipe.

 **IMPORTANT!**

- If the machine is being assembled outdoors, the motors and transmissions must be fitted with a weather cover.
- If a short circuit should occur, ensure that the electrical equipment is in working order before continuing operation.
- Ensure that the electrical equipment is kept free from dirt, dust, moisture and electrostatic charge.
- The machine is not designed to stand or walk on.

## Electrical connection

Incorrect electrical connection may lead to personal injury or damage to the conveyor equipment and/or other equipment. It can also cause malfunctions or a reduction in capacity.

 **WARNING!**

- All electrical equipment is to be connected by a qualified electrician. See separate connecting directions for electronics.
- The power switch must be permanently mounted and located to allow easy access when carrying out maintenance work.
- Ensure the safety switch for the pop-up overloading flap is engaged during operation.

 **IMPORTANT!**

- Ensure the motor protection is set to the correct ampere setting for the motor.
- Ensure the chain switch (optional accessory) is engaged during operation.

## Maintenance

Inadequate maintenance may lead to personal injury or damage to the conveyor equipment and/or other equipment. It can also cause malfunctions or a reduction in capacity.

 **WARNING!**

Read the separate maintenance instructions before taking the machine into service.



## Safety decals

### **WARNING!**

The machine is supplied with safety decals on delivery. They must not be removed or defaced. If a safety decal becomes damaged, you can order a new one free of charge from Skandia Elevator AB. Specify the part number of the decal. See the section below and the previous chapter Machine Overview.






#### There are safety decals for:









- Mandatory (white symbol on round blue background).
- Forbidden (black strike-through symbol on round white background with red surround).
- Warning (black symbol on triangular yellow background with black surround).

### **WARNING!**

The mandatory instruction, forbiddance or warning given on all safety decals must be considered or serious injury or death may follow.

Skandia Elevator machines have the following safety decals:

Part number/Safety decal Refer to the "Machine Overview" chapter for placement.	Written definition
DEK3090 	Read the "Back stop" section in the elevator's assembly instructions before test starting the motor for the first time.
DEK3100 	Do not place the valve with the motor side face down.
DEK3140 	Changing settings and equipment is prohibited.
DEK3030 	Warning for conveyor chain!
DEK3060 	Warning for bucket belt!

<p>DEK3040</p> 	<p>Warning for chain drive!</p>
<p>DEK3050</p> 	<p>Warning for belt drive!</p>
<p>DEK3070</p> 	<p>Warning for rotating conveyor drive shaft!</p>
<p>DEK3080</p> 	<p>Warning for rotating elevator drive shaft!</p>
<p>DEK3110</p> 	<p>Warning for moving machinery!</p>
<p>DEK3120</p> 	<p>Warning for moving machinery!</p>
<p>DEK3010</p> 	<p>Warning for dust explosion!</p>
<p>DEK3130</p> 	<p>Warning, a maximum of 2 people = 200 kg/440 lbs may be on the platform and ladders simultaneously!</p>

The conveyor can be assembled directly in place in the installation or separately and then lifted in place. The design and space requirements of the installation and the length of the conveyor will determine which method is most suitable.

**⚠ IMPORTANT!**

- Ensure the machine is situated correctly in relation to the planned connections.
- The conveyor length must not exceed 14 metres if being lifted after assembly. Its weight must be distributed over several lifting points with one supporting the support frame of the drive. The distance between the lifting points must be a maximum of 12 metres.
- The maximum span between supports for a standard conveyor is 6 metres. This distance is 12 metres if cable supports are used.
- Relieve the weight of the drive with braces to the ground and/or a nearby stable construction. If the machine has a geared motor, brace its support frame. Never use the motor/geared motor to brace on.


1.

Remove joining plates that are fitted the wrong way round inside/outside intermediate sections and in the drive. bolts for assembling the conveyor are underneath.


NB! The bolt used to fasten the joining plate is not needed for assembly.

2.

Fit joining plates that have been removed in the same manner and at the same end as the preassembled joining plates.

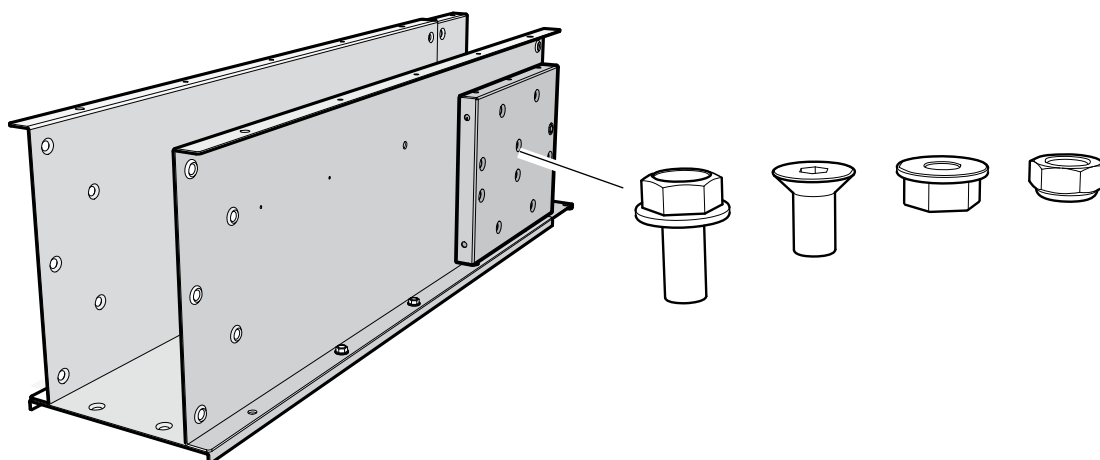

3.  
Lay out the machine parts in the order they are to be assembled.
4.  
Remove the lid plates.

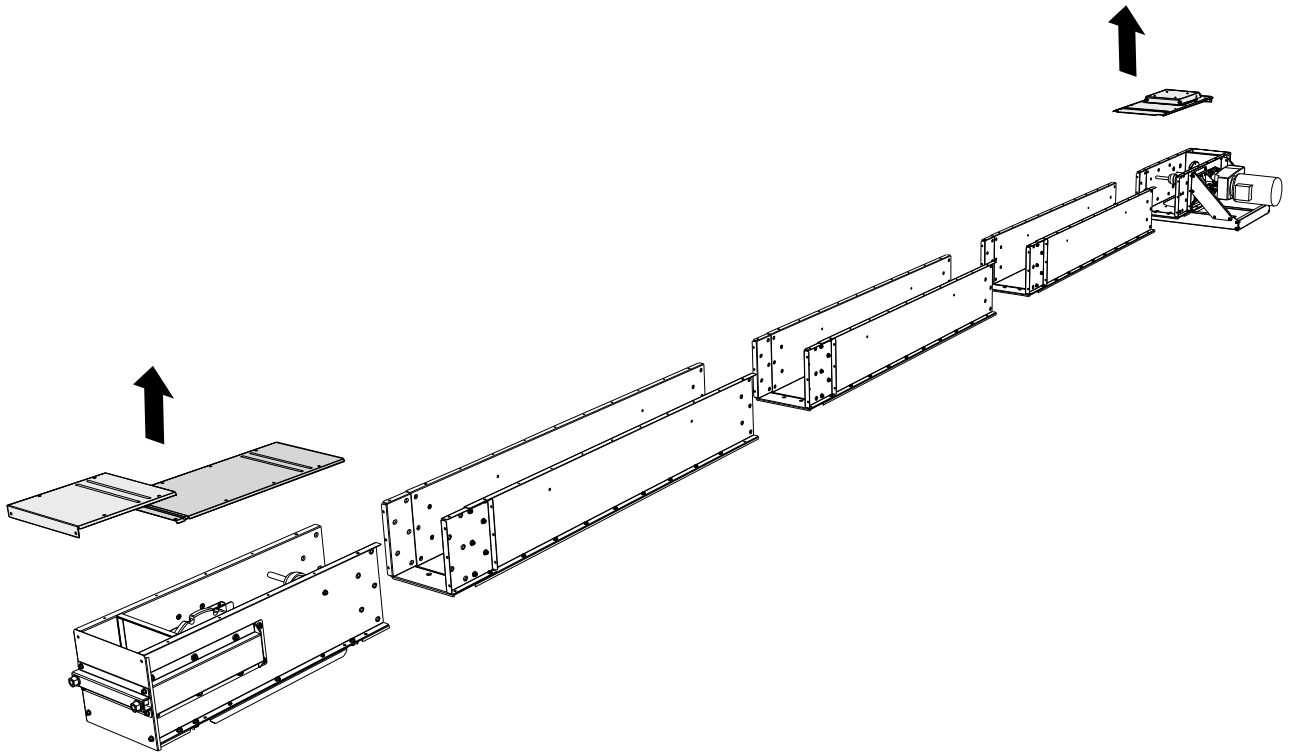

### Inclination of horizontal conveyor

The capacity of a horizontal conveyor will be reduced if it is assembled at an inclination exceeding  $5^\circ$ .

**⚠ IMPORTANT!**

If a conveyor must be inclined more than  $5^\circ$ , a conveyor designed for inclined operation must be used.

### Transport in both directions

**⚠ IMPORTANT!**

- The longest stretch of conveyor must always be aligned towards the drive.
- The conveyor chain tension must be checked often when transport is in both directions.


NB! The outlet slide is easier to fit before the conveyor is assembled.

The outlet slide can be assembled to the tail end/drive and intermediate section.

NB! When assembling the drive, it is often necessary to fit the outlet slide directed to the opposite side of the motor/gearbox.

## **⚠ IMPORTANT!**


If the outlet slides are fitted to the tail end/drive, a 1 m length of chain with return buckets must be used for every 10 metres of conveyor chain.

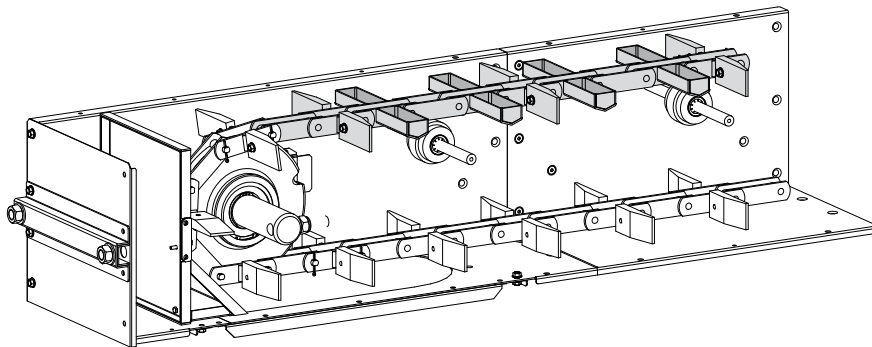

## Outlet slide in tail end/drive

NB! Instructions for components A, B & E apply to installation on the tail end. Components C, D & E apply to installation on the drive end.

1. Remove the bottom clean out hatch (A). Remove the Z-sections (B).
2. Remove the transverse beams (C, D). Remove the bottom plate (E) and cut it along the pre-punched line. Replace the bottom plate (E2) and the transverse beam (D).
3. Fit the outlet slide in the existing bolt holes with existing bolts. Fit the transverse beam (C) with existing bolts.

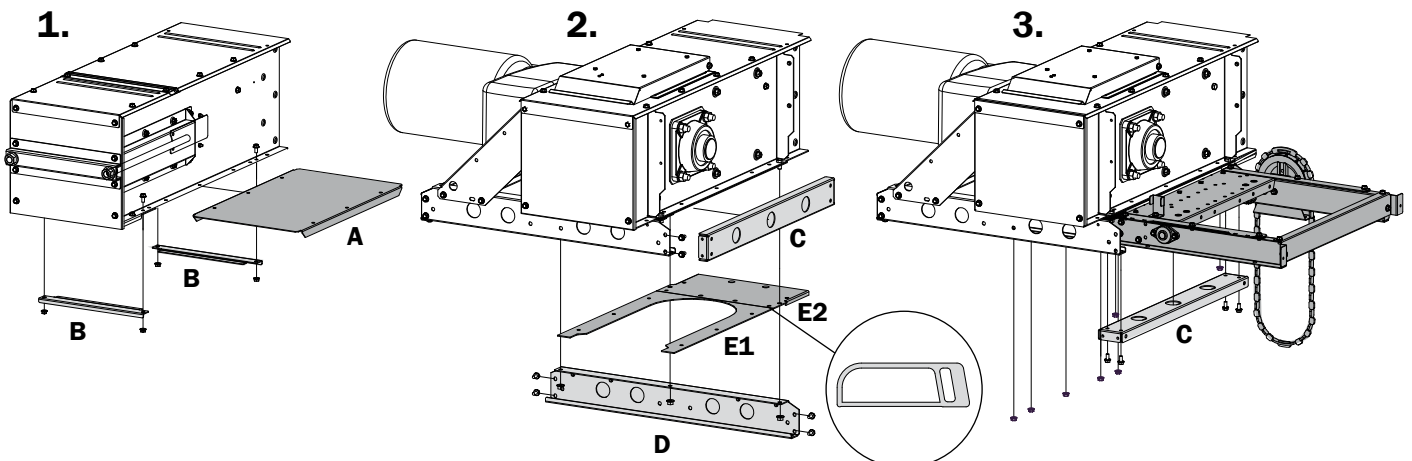


## Outlet slide in intermediate section


The centre of the outlet slide can be placed between 500 and 1500 mm in on a 2000 mm long intermediate section.

NB! If the outlet slide is placed 600, 800, 1000, 1200 or 1400 mm in on the intermediate section, it can be attached to existing holes. Locating it anywhere else will mean drilling new holes.

### 500-1500 mm

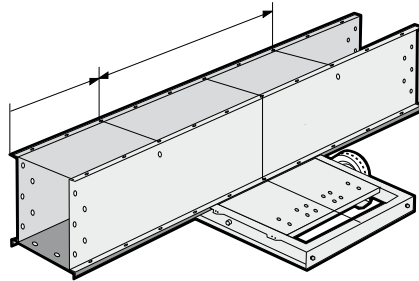

### 600, 800, 1000, 1200 or 1400 mm

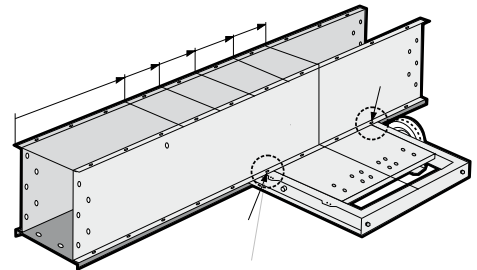

1. Mark the centre line for the outlet slide.
2. Mark the lines for cutting the bottom plate. See dimension X in the table/illustration.
3. Mark out the lines (a) for the bolt holes in the bottom plate. See dimension Y in the table/illustration.
4. Dismantle the intermediate section.
5. Cut off the bottom plate and deburr the edges.
6. Cut away some of the edges of the bottom plate on both sides towards the opening. See dimension Z in the table/illustration.
7. Drill  $\text{Ø}8.5$  mm holes (A). Use the existing holes in the outlet slide as a template (the distance between the holes varies on different conveyor sizes). Countersink the holes (A) for the bolts (B).
8. Assemble the sides and bottom plates of the intermediate section. Turn over and put in place the closed outlet slide.
9. Drill  $\text{Ø}8.5$  mm holes (C) through the lower edge of the bottom plates and side plates. Use existing holes on the outlet slide as a template.
10. Fit the outlet slide to the intermediate section.




### **IMPORTANT!**

Ensure the countersunk bolts (B) do not stick up above the bottom plate.

11. Make sure the outlet slide is easy to regulate. Adjust if necessary by undoing bolts D and adjusting with bolts E.

### 12. **IMPORTANT!**

If the outlet slide is assembled outdoors, it must be fitted with a weather cover.

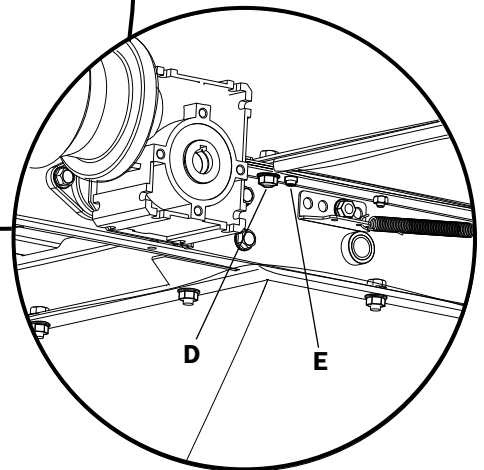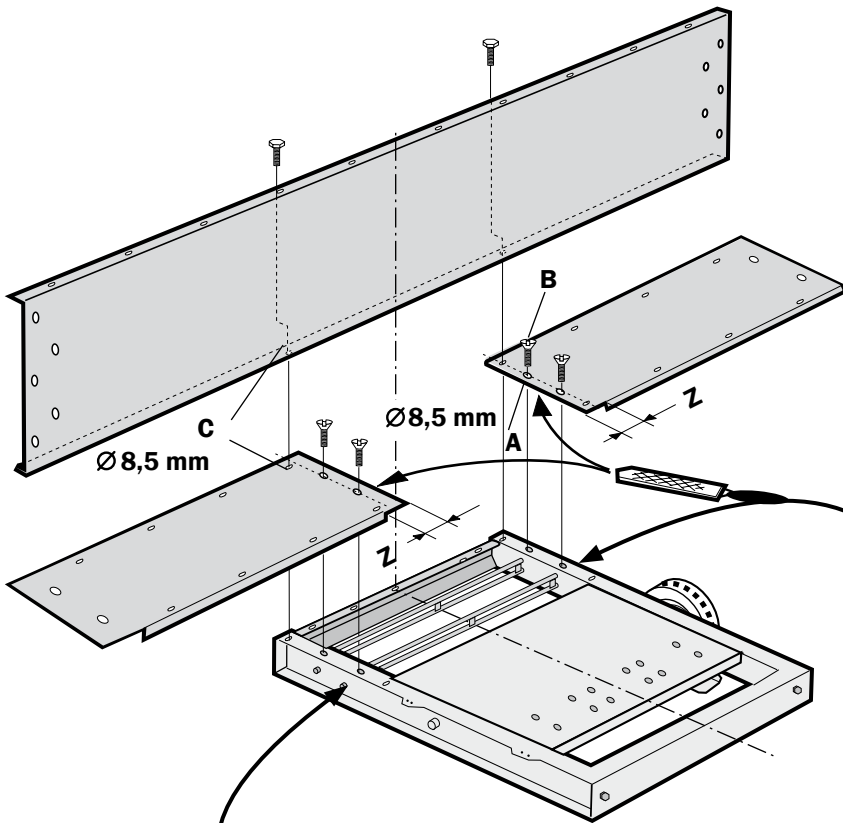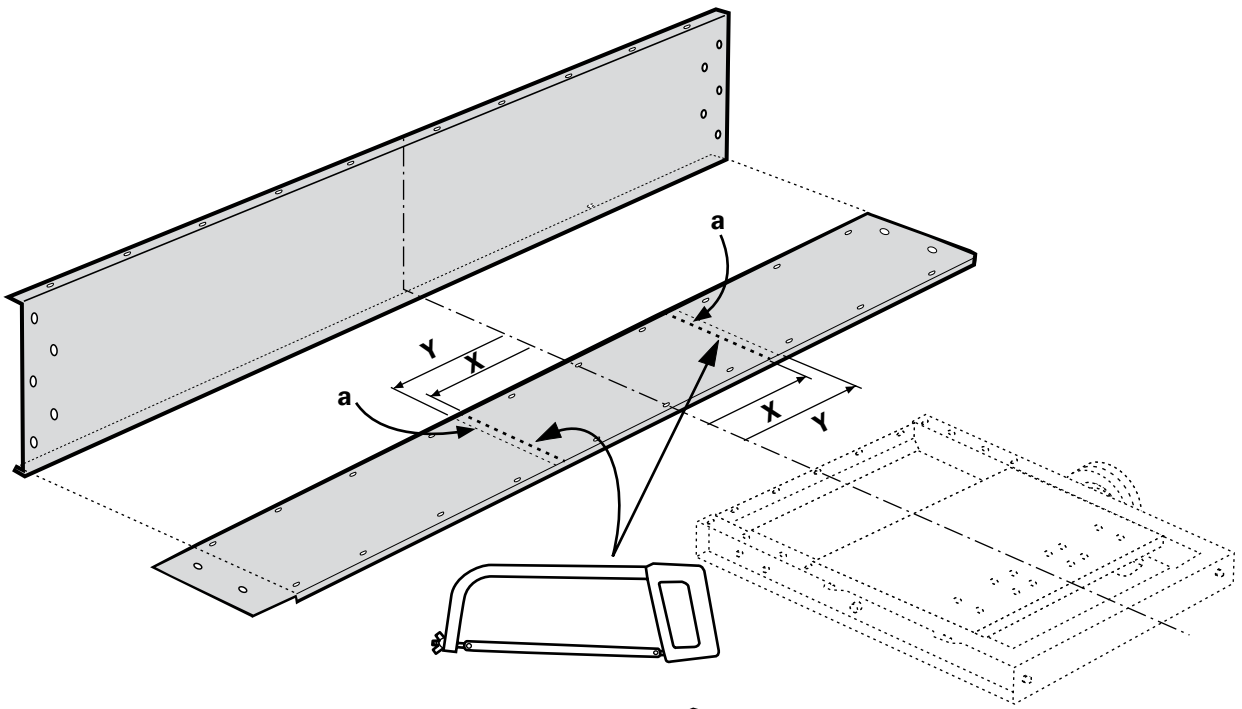

<b>X</b>	282 mm
<b>Y</b>	300 mm
<b>Z</b>	40 mm

## Brush for outlet slide

NB! The brush is fitted only on the outlet slide in the intermediate section.

### **IMPORTANT!**

If several outlet slides are to be open at the same time, a brush cannot be used.

Fit the brush X mm (see dimension X in the table/illustration) from the centre of the outlet slide in the direction of travel. Fit the brush over the centre of the outlet slide when the direction of travel is in both directions.

1.  
Mark the centre line for the chain return rollers.
2.  
Mark the centre line for the brush location.
3.  
Drill a  $\varnothing 22$  mm hole for the brush shaft where the centre lines of the brush and the chain return rollers cross.
4.  
Drill two holes for the brush shaft bearing. Use the bearings as a template.
5.  
Fit the bearings on the outside of the conveyor.
6.  
Insert the round brush shaft section with chain return roller through the bearings.
7.  
Secure the brush in the bearings with the hexagonal socket bolts.
8.  
Fit the flat, twisted part of the brush shaft.



NB! Use a left-handed brush shaft (marked L) if it is fitted on the left-hand side and a right-handed brush shaft (marked R) if it is fitted on the right-hand side.

9.  
Fit the brush in the centre of the brush shaft. The flat side of the brush is to be turned in the direction of travel.
10.  
Fit the holder for the brush shaft on the outlet slide.
11.  
Mount the brush shaft in the holder.

### 12. **IMPORTANT!**

Check the operation of the brush while the outlet slide is opening and closing.



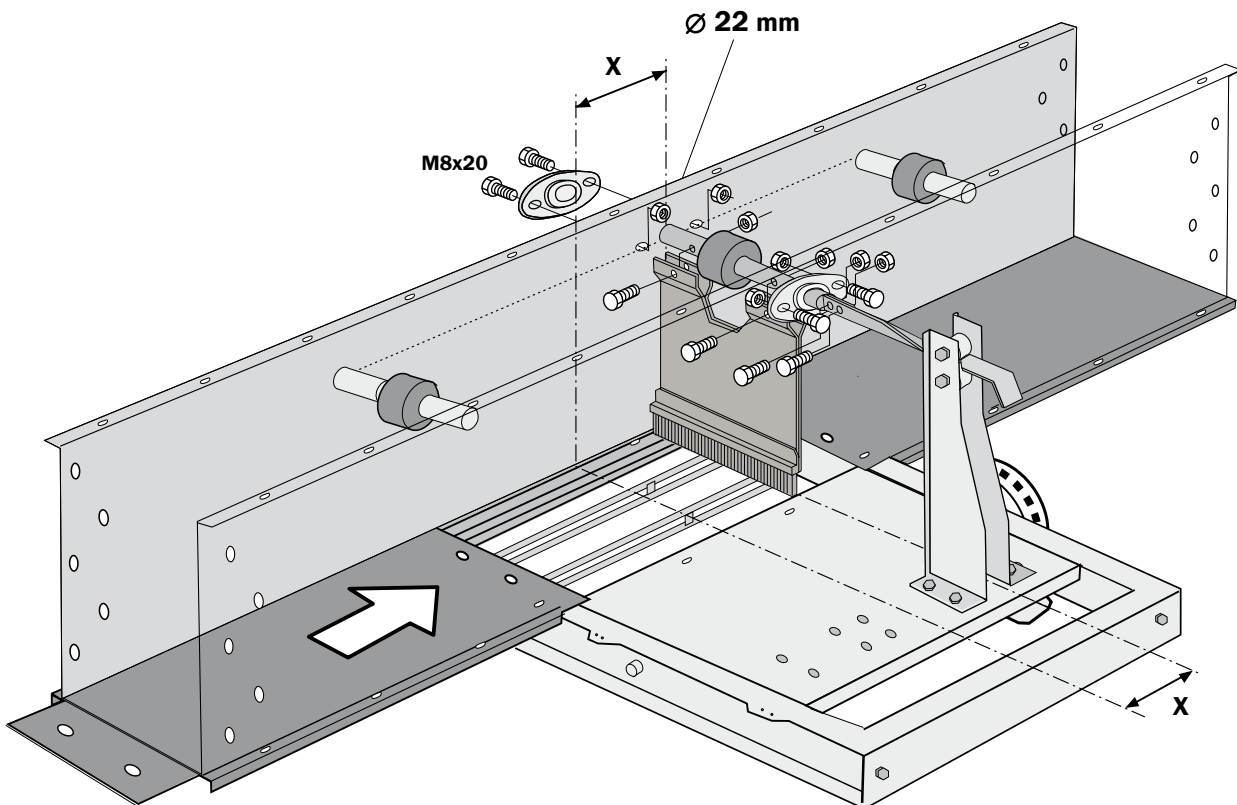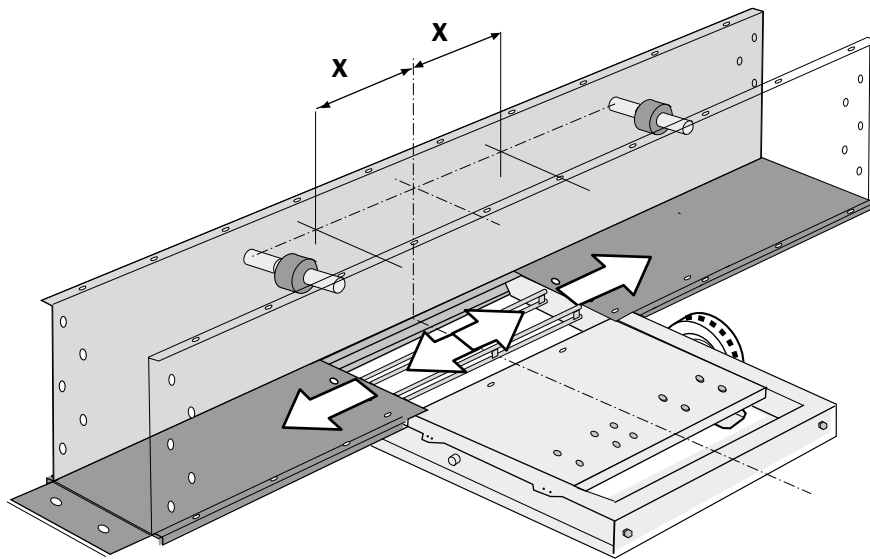

<b>X</b>	100 mm
----------	--------

### **⚠ WARNING!**

Connections to, from and between machinery must be permanently mounted and fully enclosed. If the design of the installation does not allow this at an outlet, finish off with a 1 m pipe.

Assemble the inlet/outlet as instructed in the section "Assemble the machine".


### **⚠ IMPORTANT!**

- Use only recommended inlet, outlet and connecting components.
- Ensure the ducting is dimensioned sufficiently and that its angle of inclination is at least 45°.

## Inlet

The inlet is used when feeding from a machine with customised capacity.

The inlet is positioned to illustrated dimensions.

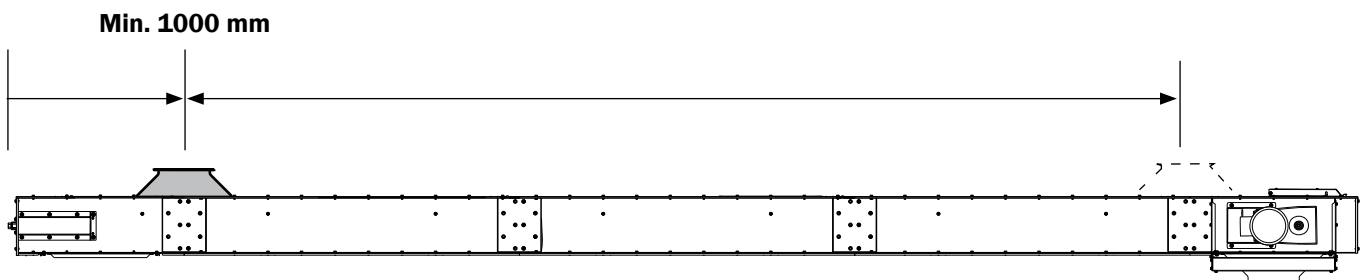


## Connection to inlet in horizontal section

### **IMPORTANT!**

The connection is to be designed so that the feeding is vertical in relation to the plane of the conveyor.

The following examples are connections between elevator and horizontal conveyor that also work well for grain with high water content.

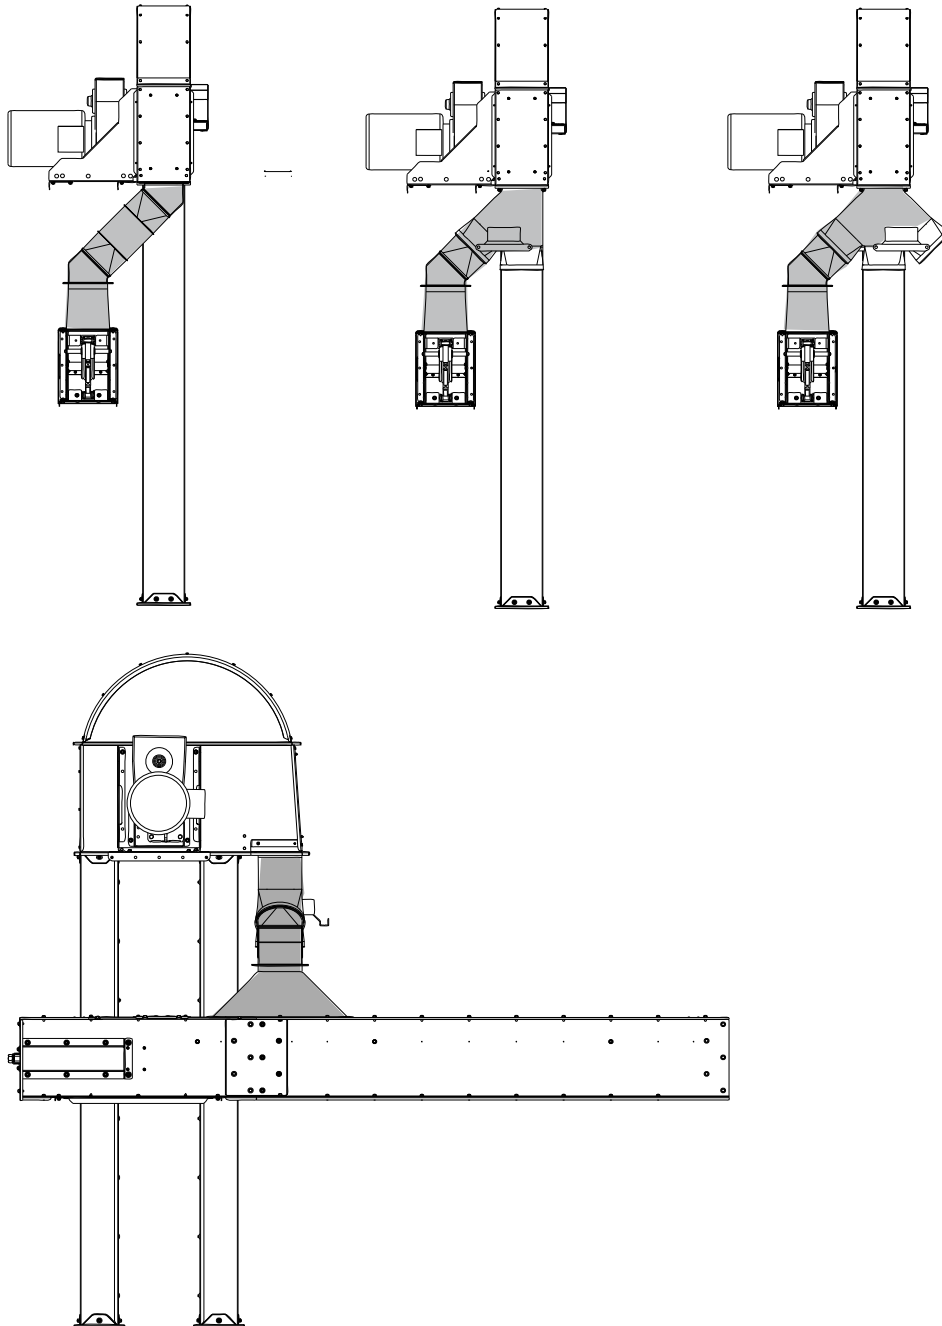

## Connection to subsequent machine

Connect the conveyor to the subsequent machine according to its assembly instructions.

1.  
Push together the machine parts.

**⚠ IMPORTANT!**

Ensure the machine parts are assembled in a straight line and are not twisted.

2.  
Fit the bottom bolts.

Fit bottom joining plates where the bottom plates do not overlap.

NB! Use lock nuts.


**⚠ IMPORTANT!**

Ensure the bottom joints are smooth.


3.  
Fit the side bolts.

**⚠ IMPORTANT!**

When assembling outdoors, the joints in the side plates, lid and inlet must be sealed with silicone.

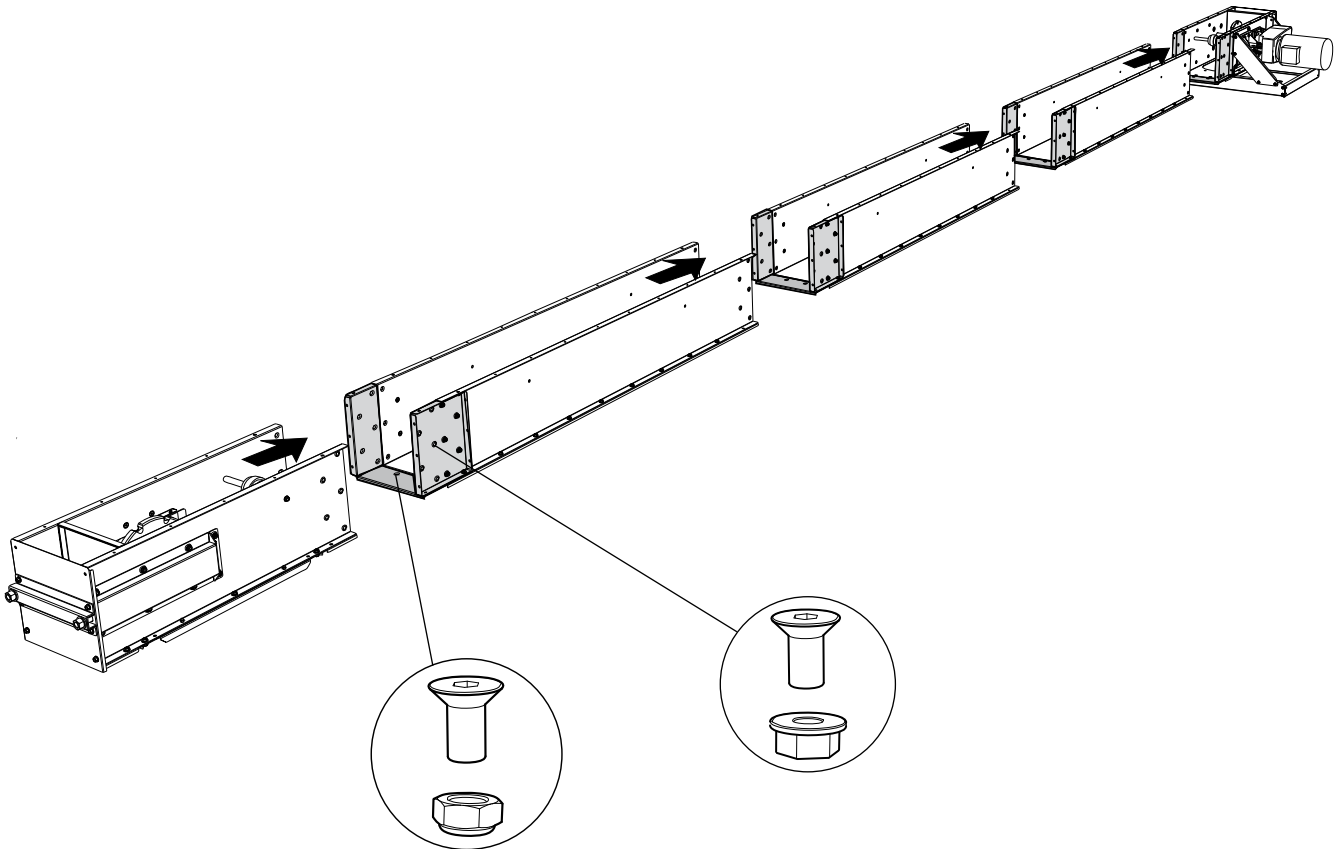

4.  
Fit the chain return rollers in the intermediate sections.

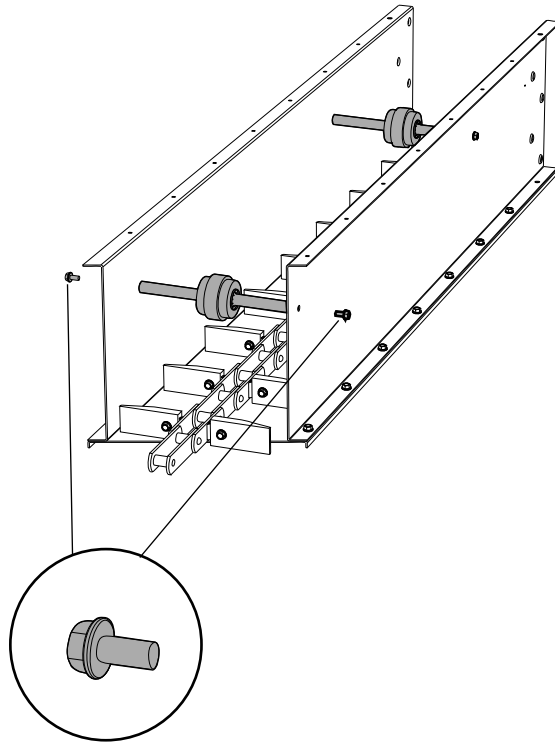

5.  
Assemble the lengths of chain in the bottom of the conveyor.  
NB! The chain brackets "push" the flights against the drive.

**⚠ IMPORTANT!**

Distribute any lengths of brush flight/bucket flight evenly along the conveyor chain.

6.  
Assemble the chain lengths on the upper level of the conveyor.


7.  
Assemble the conveyor chain over the drive's chain sprocket.

8.  
Slide the tail end shaft to forward position, towards the drive.

Position the conveyor chain over the tail end's chain sprocket. Shorten it if necessary to the correct length and then assemble it.

**⚠ IMPORTANT!**

Ensure the conveyor chain is centred, runs freely and does not foul the sides of the conveyor.

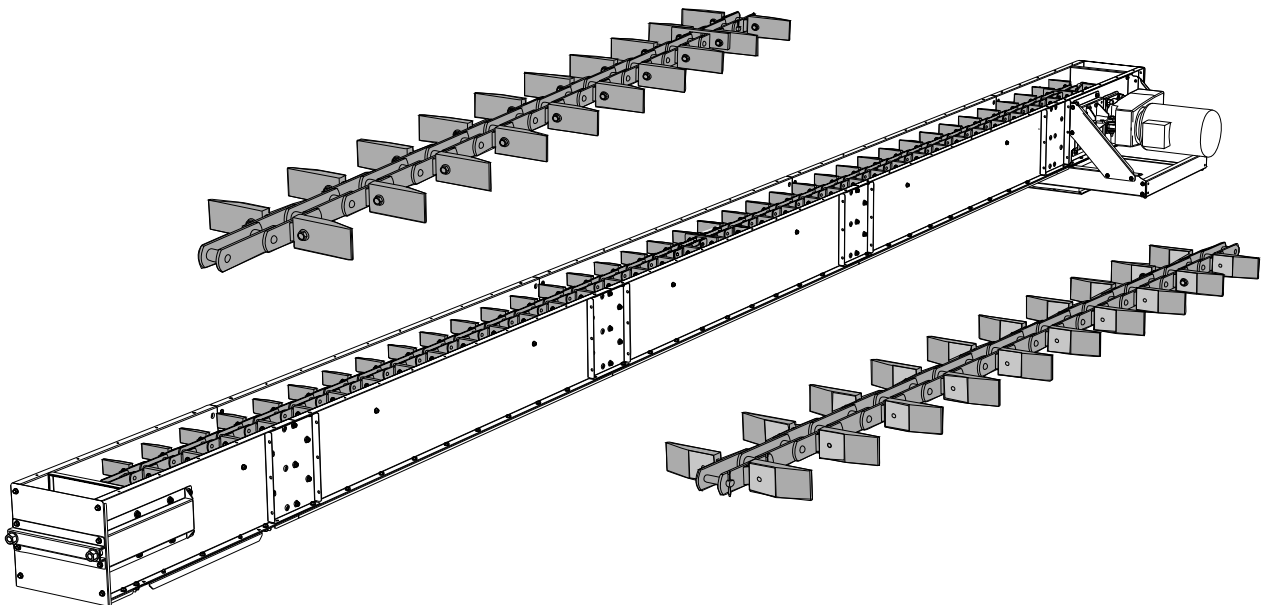


9.

Tighten the conveyor chain with the tensioning bolts in the tail end.


NB! The tensioning bolts have self-locking fixed nuts inside the conveyor.

**⚠ IMPORTANT!**

- Ensure the tail end shaft is at right angles to the conveyor chain.
- Ensure the conveyor chain is not tensioned too much.

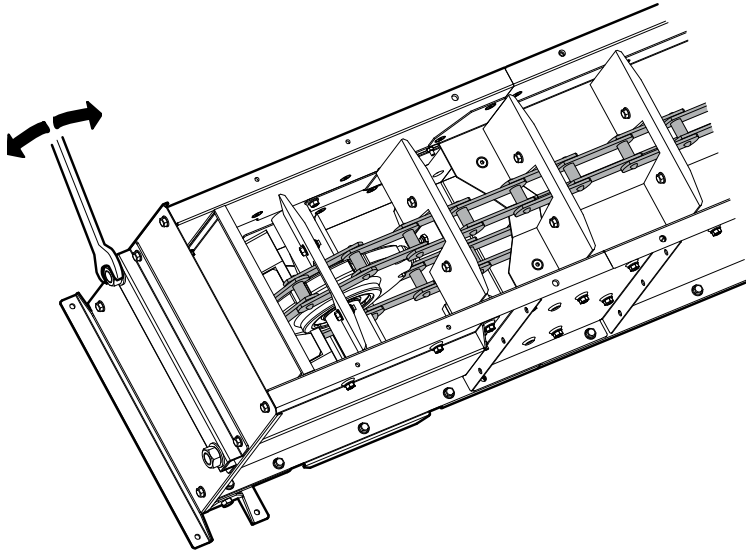

Check the tension of the conveyor chain by pressing it down between the two return rollers. If it can be pressed down 5-10 mm it is tensioned correctly.

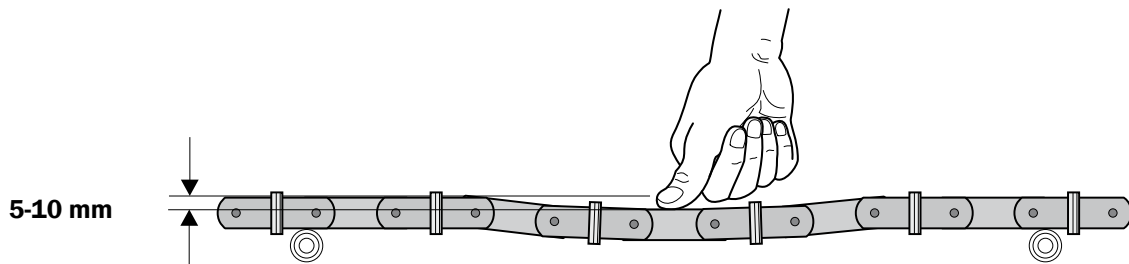

10.

Once assembly of the conveyor is complete, test run it for a while and then check the tension once again.

A new conveyor chain must be run for a period and then readjusted.

**⚠ IMPORTANT!**

Check the conveyor chain after 50 operating hours. See separate maintenance instructions for information on maintenance.

NB! Fit inlet/outlet with existing bolts.

11.

Mark the edges of the inlet on the lid. Add 30 mm inwards to each marking and cut there. Deburr the edges.

Fit the inlet after the lid has been assembled.


12.

Stagger the lids when fitting.

NB! Use the joining plate to cover joints in the lid that do not overlap.

**⚠ IMPORTANT!**

- Fit rubber mouldings in the joint grooves.
- When assembling outdoors, the joints in the side plates, lid and inlet must be sealed with silicone.

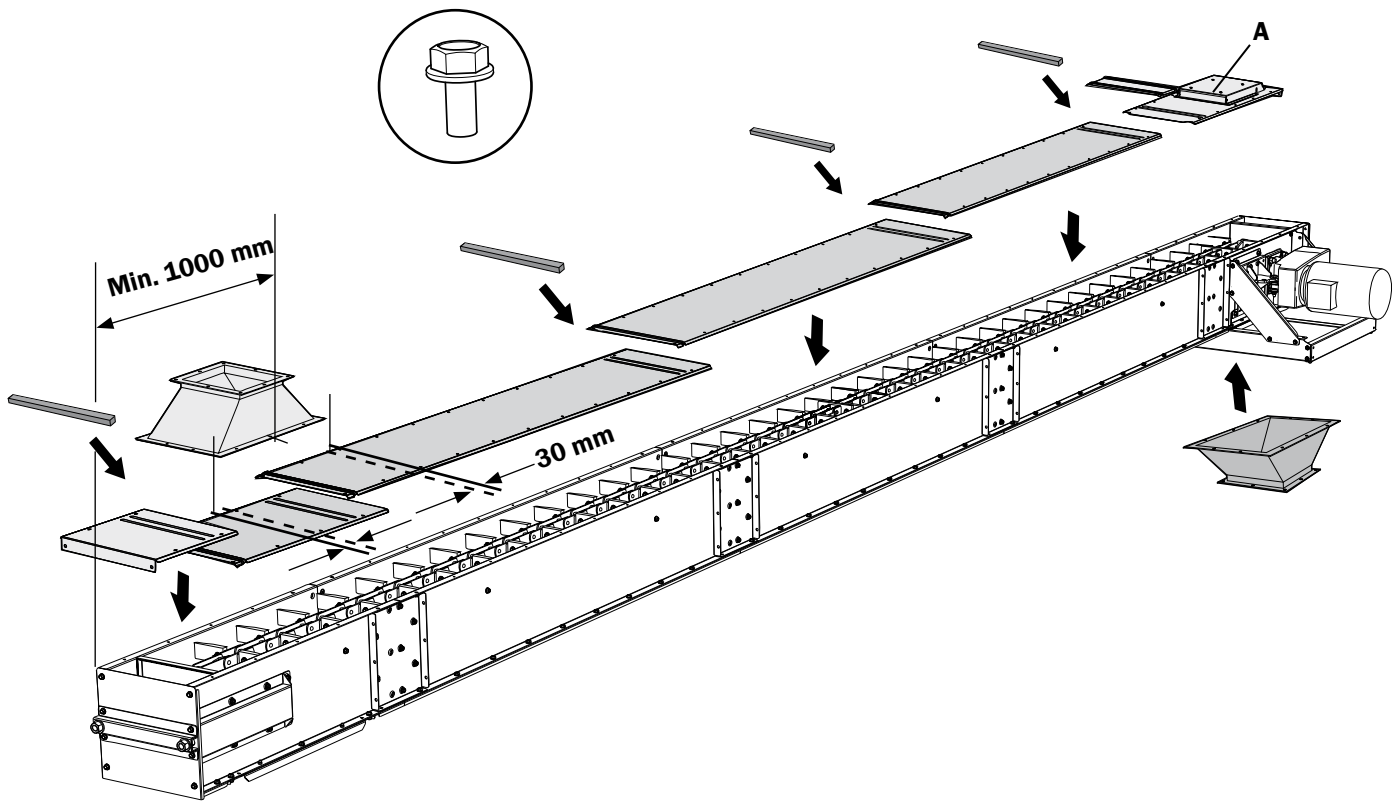

13.

**⚠ WARNING!**

The rotating drive shaft is partially exposed between the gearbox motor and the drive if the weather cover is not used.



14.

Pop up overloading flap (A) with safety switch stops the conveyor if it is overloaded or when the pop up overloading flap is opened.

 **WARNING!**

- Ensure the safety switch for the pop-up overloading flap is engaged during operation.
- All electrical equipment is to be connected by a qualified electrician. See separate connecting directions for electronics.







**SKANDIA**  
ELEVATOR

**SKANDIA ELEVATOR AB**

KEDUMSVÄGEN 14, ARENTORP  
S-534 94 VARA, SWEDEN

PHONE +46 (0)512 79 70 00  
FAX +46 (0)512 134 00

INFO@SKANDIA-ELEVATOR.SE  
WWW.SKANDIA-ELEVATOR.SE